BERTAZZONI DESIGN SERIES
36" SEGMENTED COOKTOPS

PM36 1 IG X

PM36 5 00 X

PM36 5 S0 X

PM36 3 I0 X

PM36 3 0G X

PM36 0 IG X

Bertazzoni sets the new standard in surface cooking flexibility with its new Design Series Segmented cooktops. Housed in a sleek and sophisticated low-profile stainless steel frame, these new 36" cooktops are available in six combinations of gas, electric griddle and induction to perfectly match your own style of cooking. Combine a segmented cooktop with Bertazzoni Design Series or Professional Series wall ovens for a perfectly integrated kitchen, or upgrade your existing cooktop and elevate your surface cooking to the ultimate level.

BRASS POWER BURNER - 18K BTUs

Bertazzoni's exclusive dual power burner in cast brass delivers high-efficiency performance from delicately low simmer to full power (750-18,000 BTUs) with best-in-class heat-up time.

TEPPAN-YAKI GRIDDLE

Sear or cook food directly on the electric steel griddle.

DUAL ZONE INDUCTION

Boil water fastly and cook without surface heat thanks to induction technology. Available in combination with gas and griddle segments or in a 5 heating zone induction-only model.

F.LLI BERTAZZONI ITALIA

THE INTEGRATED KITCHEN

BERTAZZONI DESIGN SERIES
36” COOKTOP 5-BURNERS

Cooktop 36"
PM36 5 00 X
5 burners

Features	
Brass Burner	5
Dual wok	750-18000 Btu/h
Rapid	11000 Btu/h
Semi-rapid	6200 Btu/h
Griddle power	-
Electrical Requirements	120V 60Hz
Max. Amp Usage	1 Amp

Comes with wok ring (408117)
Optional: simmer ring (408077) available

Rif.	Dim. Inches	mm
L3 (min)	2 3/4	70
D	20 15/32	520
L1	19 11/16	500
L9 (min)	6 25/32	172
L10	33 7/8	860
S	2 11/16	69
W	35 1/32	890

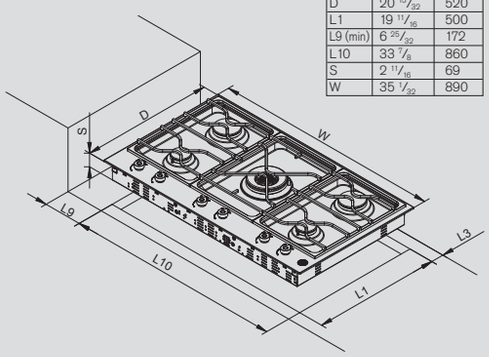

BERTAZZONI DESIGN SERIES
36” COOKTOP 5-BURNERS

Cooktop 36"
PM36 5 S0 X
5 burners

Features	
Brass Burner	5
Dual wok	750-18000 Btu/h
Rapid	11000 Btu/h
Semi-rapid	6200 Btu/h
Griddle power	-
Electrical Requirements	120V 60Hz
Max. Amp Usage	1 Amp

Comes with wok ring (408117)
Optional: simmer ring (408077) available

Rif.	Dim. Inches	mm
L3 (min)	2 3/4	70
D	20 15/32	520
L1	19 11/16	500
L9 (min)	6 25/32	172
L10	33 7/8	860
S	2 11/16	69
W	35 1/32	890

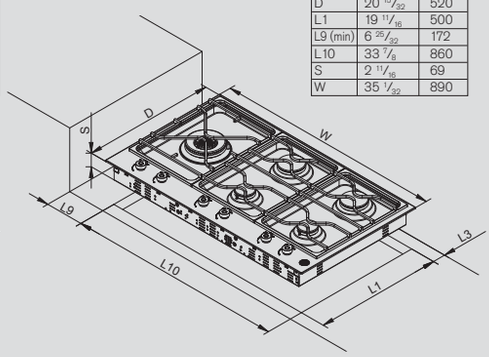

BERTAZZONI DESIGN SERIES
36” COOKTOP 3-BURNERS AND GRIDDLE

Cooktop 36"
PM36 3 0G X
3 burners + griddle

Features	
Brass Burner	3
Dual wok	750-18000 Btu/h
Rapid	11000 Btu/h
Semi-rapid	6200 Btu/h
Griddle power	800 W
Electrical Requirements	120V 60Hz
Max. Amp Usage	12

Comes with wok ring (408117)
Optional: simmer ring (408077) available

Rif.	Dim. Inches	mm
L3 (min)	2 3/4	70
D	20 15/32	520
L1	19 11/16	500
L9 (min)	6 25/32	172
L10	33 7/8	860
S	2 11/16	69
W	35 1/32	890

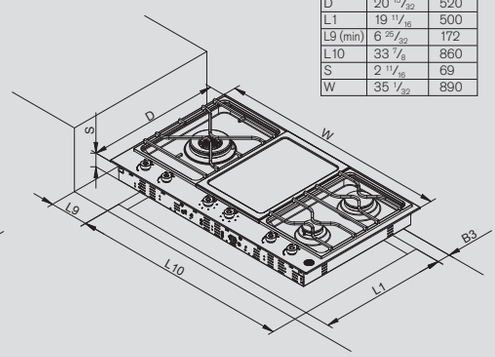

BERTAZZONI DESIGN SERIES
36” COOKTOP 3-BURNERS + 2 INDUCTION ZONES

Cooktop 36"
PM36 3 I0 X
3 burners + 2 induction zones

Technical specification	
Brass Burner	3
Dual wok	750-18000 Btu/h
Rapid	11000 Btu/h
Semi-rapid	6200 Btu/h
Induction (medium)	5 11/16" Diam,: 1400/1800W
Induction (large)	-
Griddle power	-
Electrical Requirements	208-240V 120V 60Hz
Max. Amp Usage	15 Amp

Comes with wok ring (408117)
Optional: simmer ring (408077) available

Rif.	Dim. Inches	mm
L3 (min)	2 5/8	70
D	20 15/32	520
L1	19 11/16	500
L9 (min)	6 25/32	172
L10	33 7/8	860
S	2 11/16	69
W	35 1/32	890

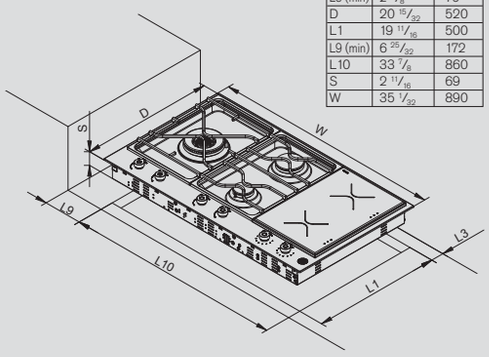

BERTAZZONI DESIGN SERIES
36" COOKTOP 1-BURNER + 2 INDUCTION ZONES AND GRIDDLE

Cooktop 36"
PM36 1 IG X

Technical specification	
Brass Burner	3
Dual wok	750-18000 Btu/h
Rapid	n/a
Semi-rapid	n/a
Induction (medium)	5 11/16" Diam,: 1400/1800W
Induction (large)	-
Griddle power	800W
Electrical Requirements	208-240V 120V 60Hz
Max. Amp Usage	30 Amp

Comes with wok ring (408117)
Optional: simmer ring (408077) available

Rif.	Dim. Inches	mm
B3 (min)	2 5/8	70
D	20 15/32	520
L1	19 11/16	500
L9 (min)	6 25/32	172
L10	33 7/8	860
S	2 11/16	69
W	35 1/32	890

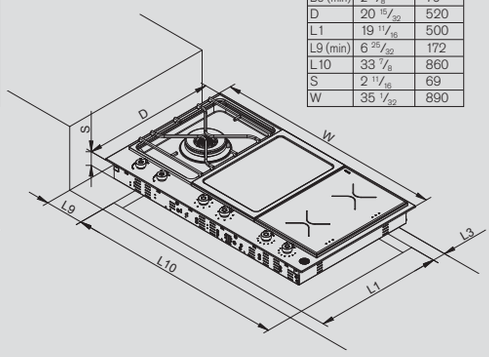

BERTAZZONI DESIGN SERIES
36" COOKTOP 5 INDUCTION ZONES

Cooktop 36"
PM36 0 IG X

Technical specification	
Brass Burner	-
Dual wok	-
Rapid	-
Semi-rapid	-
Induction (medium)	5 11/16" Diam,: 1400/1800W
Induction (large)	10 1/4" Diam,: 2400/3000W
Griddle power	-
Electrical Requirements	208-240V 120V 60Hz
Max. Amp Usage	15 Amp

Comes with wok ring (408117)
Optional: simmer ring (408077) available

Rif.	Dim. Inches	mm
L3 (min)	2 5/8	70
D	20 15/32	520
L1	19 11/16	500
L9 (min)	6 25/32	172
L10	33 7/8	860
S	2 11/16	69
W	35 1/32	890